

Light is OSRAM

OSRAM


Product data sheet: EM 350/120-277/1A4 P7

Constant Current LED Driver

ELEMENT LED Power Supply is the good choice for industry and outdoor lighting applications. This driver offers output current of 1400mA and an input voltage range 120V – 277V*.

Benefits

High surge protection up to 6 kV;
High efficiency and reliability;
Fix current for optimized fixture design
High Ambient temperature up to 55° C
IP67
Long life time

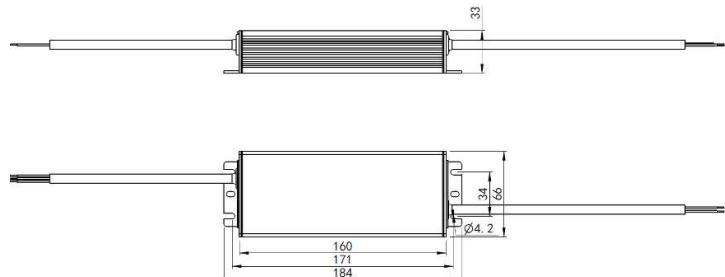

Applications

Industrial, high bay, flood lighting
Suitable for luminaries of protection class I

Approvals



In preparation, if not already printed on product label

Housing material: Aluminum Color: Silver

Product Features

- Fix output current 1400mA
- Output power up to 350 W
- Uout: 170 - 250Vdc
- High surge capability up to 6/6 kV
- Mains voltage 120 – 277 V
- IP67
- Wide t_a range -40°C...+55°C
- 50'000 h lifetime at $t_c = 75$ °C

*refer to input vs load, page 3

Electrical Specifications

Item	Value	Unit	Remarks
INPUT	Nominal Voltage	120 - 277	V
	Nominal frequency	50 / 60	Hz
	AC voltage range	108 – 305	V
	DC voltage range	n/a	V
	Maximum voltage	300	V _{AC}
	Nominal current	2.2	A
	Total Harmonic Distortion (THD)	< 10	%
	Power factor	≥ 0.98	
	Efficiency in full load	96	%
	Power losses	14	W
	No-load power	n/a	W
	Networked standby power	n/a	W
	Protection class	I	Suitable for class I luminaires
	Touch Current	< 0.7	mA pk
	Inrush current	TBD	A pk
OUTPUT	Max. units per circuit breaker	B10: B16: B25:	
	Nominal voltage range	170 - 250	V
	Maximum voltage	400	V
	Nominal current range	1400	mA
	Current accuracy	± 5	%
	Current ripple	< 5	%
	Nominal power range	245 – 350	W
	Maximum power	350	W
DIM	Galvanic isolation	No	
	Dimming control	n/a	
	Dimming range	n/a	%
	Galvanic isolation from output circuits	n/a	
	Galvanic isolation from input circuits	n/a	
	LEDset2	n/a	
	NTC input	n/a	
	DALI-2 Luminaire Data	n/a	
	DALI-2 Energy Data	n/a	
ENVIRONMENT	DALI-2 Diagnostic Data	n/a	
	Ambient temperature range t _a	-40 ... +55	°C
	Maximum case temperature t _c	90	°C
	Max. case temp. in fault condition	n/a	°C
	Storage temperature range	-40...+85	°C
	Relative humidity	5 ... 95	%
	Surge transient protection	6 6	kV
	IP rating	IP 67	Potted
	Mains switching cycles	> 100'000	10 sec on, 10 sec off
	Expected lifetime	50'000	hrs
Weight		700	g
Dimensions		184 x 66 x 33	mm


Protections

Overload, No load, Short-circuit, Output Overvoltage

See remarks on page 5.

Electrical characteristics


Wiring Diagram

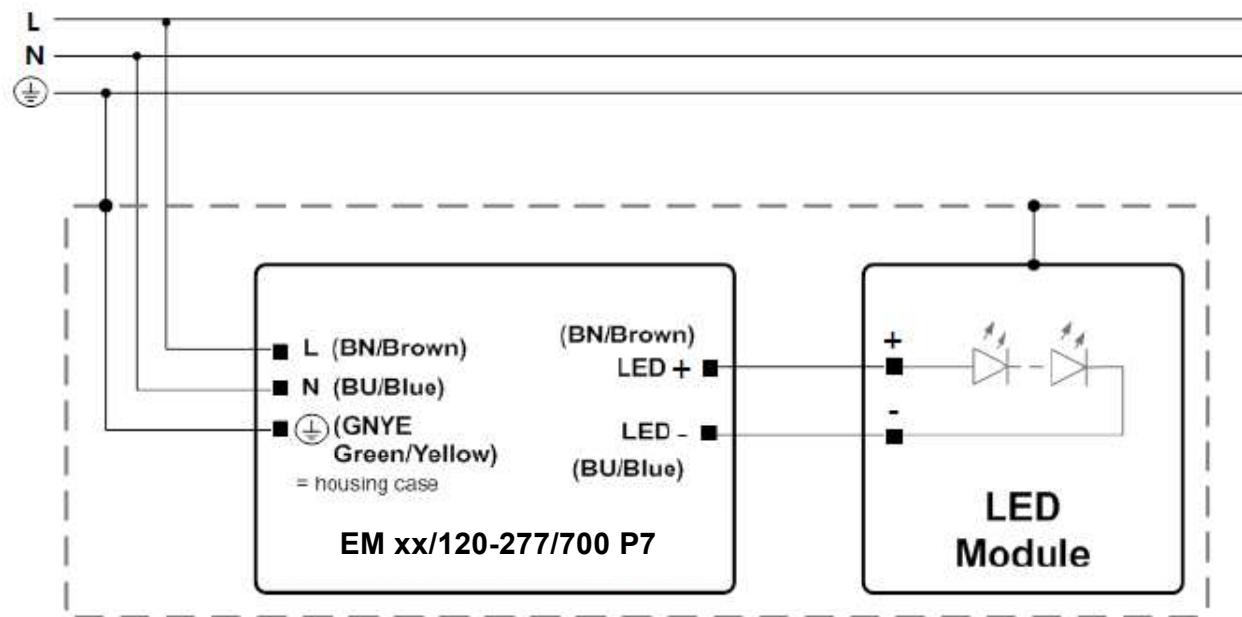

	Item	Value	Unit	Remarks
INPUT	Cable cross section	1.0	mm ²	L (Brown/BN), N (Blue/BU), PE (Green/Yellow, GNYE)
	Wire preparation length	10	mm	
	Type of wire	Flexible three core cable		
	Lead length	1000 ± 20	mm	
OUTPUT	Cable cross section	1.0	mm ²	LED+ (Brown/BN), LED- (Blue/BU)
	Wire preparation length	10	mm	
	Type of wire	Flexible two core cable		
	Lead length	300 ± 20	mm	
DIMMING	Cable cross section	n/a		
	Wire preparation length	n/a		
	Type of wire	n/a		
	Lead length	n/a		
CABLE / LENGTH	LED+/LED-	< 2	m	

Remarks

- **Input voltage range:** refer to graph Typical Input Voltage vs. Load
- **Output short circuit protection:** shut down of driver occur in case of output short circuit without damage to the unit.
- **Output overload/voltage protection:** In case the input voltage of the load exceeds the output voltage range which is auto defined by output current setting of the driver ($V_o=P_o/I_o$), it automatically reduces the output current.
- **No load protection:** the driver automatically adjusts the output voltage to the maximum output voltage which is auto defined by output current setting of the driver ($V_o=P_o/I_o$) if no load is connected.
- Disconnect the power before servicing. Terminal block is not included, installation must be performed by qualified person;
- Suitable for luminaires of protection class I only. The earth connection is conducted as protection earth (PE). The LED Driver must be earthed via earth terminal or metal housing.
- The protective earth (GNYE/PE) wire and product casing should be connected to the heat sink of the LED module to improve the surge withstand capability of the system and EMI in critical luminaires;
- Not suitable to be mounted in ceiling corners.
- The LED control gear cannot be abutted against or covered by normally flammable materials or used in installations where building insulation or debris is, or may be, present in normal use.
- The external flexible cable or cord of this driver cannot be replaced; if the cord is damaged, the driver shall be destroyed.
- The dimmer should fulfill at least basic insulation between control voltage and dimming circuit (for Australia and New Zealand).
- The minimum clearance distance from the top and sides of the controlgear to normally flammable building elements is $A=B=C=\text{Min.}10\text{mm}$, this clause does not apply when the LED driver is built-in the luminaires (for Australia and New Zealand).

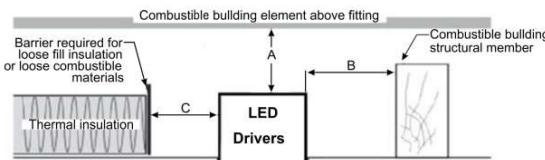

- The startup time to reach the set output current is less than 2s.
- For further details please consult the application note.

Notes

OSRAM products must never be directly exposed to external influences. Always provide adequate protection for relevant applications (covers, housings etc.) otherwise any warranty claim will be invalid.

Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Standards

Ordering information

	Product name	EAN10	EAN40	Pieces / box
IEC 61347-1				
IEC 61347-2-13	EM 350/120-277/1A4 P7			20
IEC 55015				
IEC 61547				
IEC 61000-3-2				
IEC 61000-3-3				

Disclaimer

Subject to change without notice. Errors and omission accepted. Always make sure to use the most recent release. The latest release of the datasheet is available under the following link www.osram.com

OSRAM GmbH

Head Office:

Marcel-Breuer-Strasse 6
80807 Munich, Germany
Phone +49 89 6213-0
www.osram.com

OSRAM